

Features:

- PowerLink engine
- PowerLink Alternator, Class H
- Genset Canopy IP44 protection, Control panel IP56 protection
- Control module PLC-920
- Breaker:
- Speed governor: Mech governor
- Excitation system: Brushless
- A.V.R model: SX460
- 50°C radiator
- Fire extinguisher
- Oil pump on the engine
- ATS receptacle
- Lockable battery isolator switch
- Powder coated canopy
- Vibration isolators between the engine/Alternator and base frame
- Integrated wiring design
- High water temperature protection
- Steel base frame with forklift slots
- Big daily fuel tank



Output Ratings

Generator Set Model	Prime Power		Standby Power	
	kVA	kW	kVA	kW
GMP20PXS	20	16	22	17.6

Ratings at 0.8 power factor

Dimensions and Weights


Model	L x W x H-mm	Dry Weight-kg
GMP20PXS	2292x 830x 1346	1012

Notes:

***Prime Power** Continuous duty operation, under variable load 24/24h-10% over load permissible 1 hour/12 hours;

****Standby Power** Standby duty, operation under variable load, without over load;

Standard Reference Conditions Note: Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m(328 ft) A.S.L. 30% relative humidity.

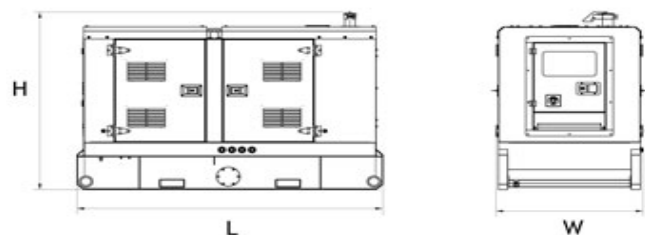

Ratings and Performance Data

Engine Brand	Powerlink
Engine Model	4D2.7CG
Alternator Brand	PowerLink
Alternator Model	PL1E
Control System	PLC-920
Circuit Breaker Type	
Frequency / Phase	50Hz/3Phase
Engine Speed (RPM)	1500
Fuel Tank Capacity (L)	150
Fuel Consumption (L/h) (100%load)	5.7
Model Type	Soundproofed
Standard Package	Plastic
Noise Level@7m (dBA)	63.7
Generator set Manufacture	PowerLink
Oil Consumption (L/h)	0.04
Volatage (V)	380/400/415/440
Silencer Noise Reduction (dBA)	10-12

Engine Model:4D2.7CG

Engine Technical Data

Engine Model	4D2.7CG
Engine Brand	Potise
Number of Cylinders	4
Cylinders Arrangement	Inline
Bore/Stroke (mm)	90/105
Speed (RPM)	1500
Displacement (L)	2.67
Compression Ratio	18.4
Air Intake system	Naturally aspirated
Cooling Method	Water cooled
Coolant Capacity (L)	5
Prime Power (kWm)	21
Standby Power (kWm)	23
Governing Type	Mech
Back Pressure (mmhg)	≤10
Battery (V)	12

Fuel System

Fuel Tank	steel			
Fuel Tank Capacity (L)	150			
Fuel tank type	Double-layer			
Recommended Fuel Type	0# or ASTM2			
Injection System	Direct injection			
Fuel Consumption:				
GMP20PXS	100% Load	75% Load	50% Load	25% Load
L/h	5.7	4.2	3	1.7

(Based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)

Lubrication System

Lube oil label	
Maximum Oil Temp. (°C)	≤100
Oil capacity (L)	6.5

Exhaust and silencer System

Exhaust Air Flow (m³/hr)	288
Exhaust Air Temp. (°C)	N/A
Maximum Allowable Back Pressure (mmhg)	3.5
NOx (mg/Nm³)	N/A
Silencer Quantity	1
Silencer Type	Industrial silencer

Cooling System

Radiator	50
Coolant Capacity (L)	5
Coolant Change Time (Year/h)	2/10000
Coolant Intake Temp. (°C)	65
Coolant Output Temp. (°C)	85

Designed to operate in ambient conditions up to 50°C (122°F). Contact your local PowerLink Dealer for power ratings at specific site conditions

Air Intake system

Air Filter Type	Dry type
Intake Air Flow (m³/h)	216
Intake System	Naturally aspirated
Intake Air Temp. (°C)	25

Conditions

Altitude (m)	
Ambient Temp. (°C)	-5°C-50°C
Barometric Pressure (kpa)	100
Relative Humidity	< 80%

Alternator Model:PL1E

Alternator Physical Data

AVR Model	SX460
Alternator Brand	PowerLink
Alternator Model	PL1E
Excitation System	Brushless
Housing Protection	IP23
Power Factor	0.8
Rated Stator Temp. rise (°C)	125
Rotor Insulation Class	H
Voltage Fluctuation(no load to full load)	±0.5%
Winding Pitch	2/3
Wiring Connection	Series Star

Performance Data

Time constants/400V (Ms)	
T'd	0.027 s
T''d	0.006 s
T'do	0.7 s
Ta	0.0055 s
Short-circuit current (3 IN / 10 s)	300 % (3 IN) : 10s
SHORT CIRCUIT RATIO	1/Xd
Reactances (Per Unit)	
Xd	
X'd	
X''d	


Alternator Operating Data

Overspeed (rpm)	2250
Voltage Regulation(Steady state)	± 1.0 %
THF(BS EN60034-1)	< 50
TIF(NEMA MG 1-22)	< 2%
Air Flow (m³/s) -Alternator 50Hz/60Hz	0.216
Altitude-Alternator (m)	1000




Voltage Technical Data

Voltage	Prime		Standby	
	kVA	kW	kVA	kW
380V@50Hz	22.5	18	24.75	19.8
400V@50Hz	22.5	18	24.75	19.8
415V@50Hz	22.5	18	24.75	19.8
415V@60Hz	30	24	33.0	26.4
440V@60Hz	30	24	33.0	26.4
480V@60Hz	30	24	33.0	26.4


Overall Dimensions

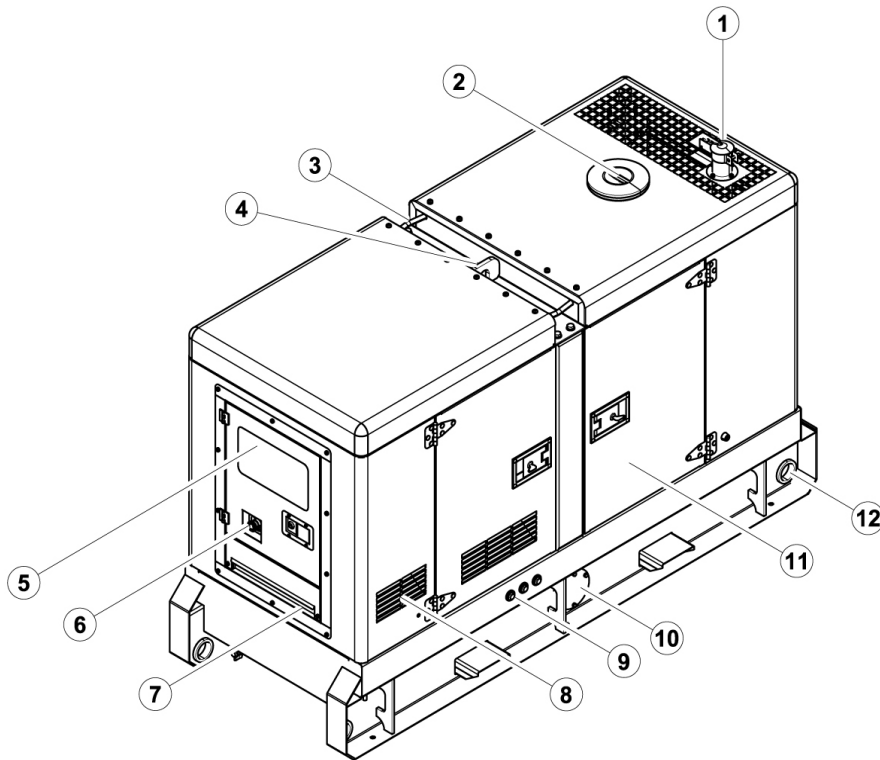

- | | |
|-------------------------|---|
| ⑧ Air inlet | ⑮ Fork lift channel |
| ⑦ Cable trench | ⑭ Base frame |
| ⑥ Emergency stop switch | ⑬ External fuel inlet/return hose fitting |
| ⑤ Control cabinet | ⑫ Tie down |
| ④ Lifting lug | ⑪ Access door |
| ③ Roping lug | ⑩ Fuel drain |
| ② Coolant inlet | ⑨ Oil / coolant drain hose fitting |
| ① Exhaust gas outlet | |

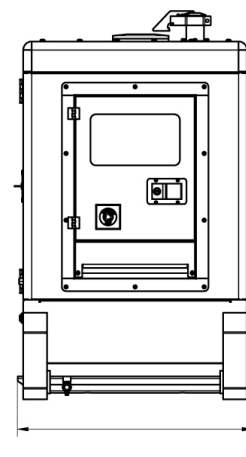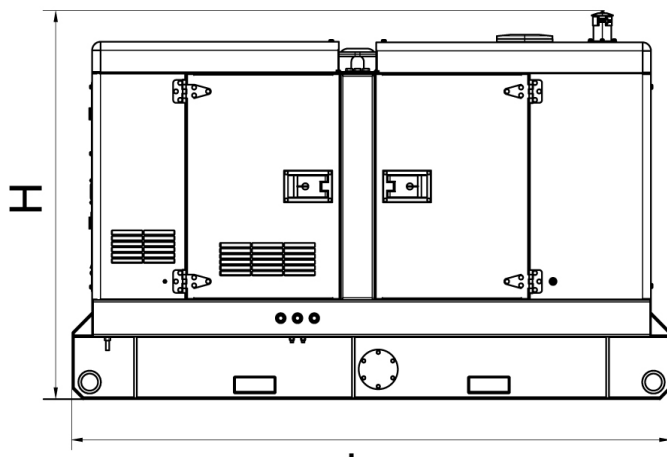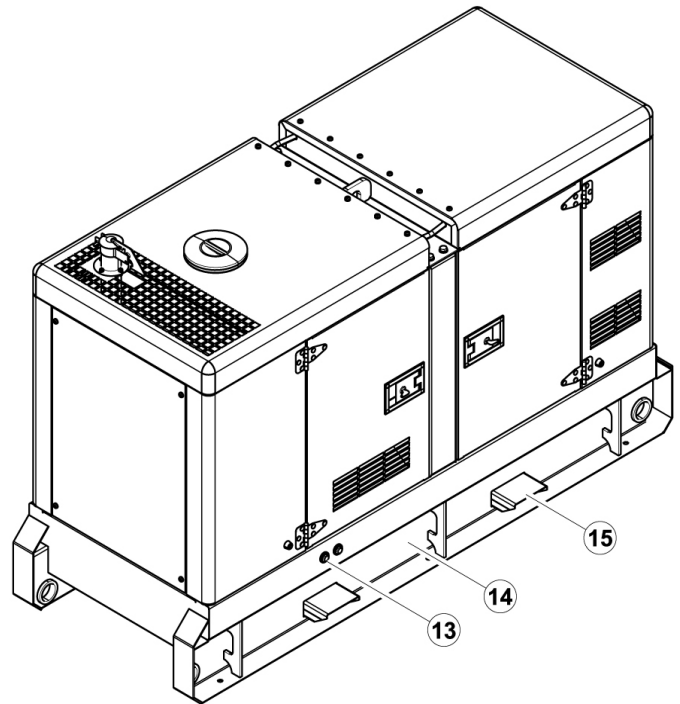


Control System

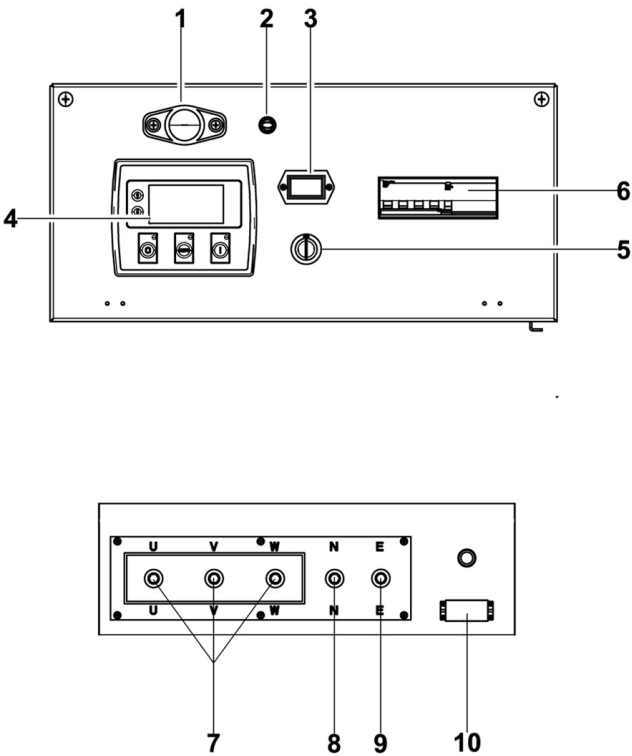

Ref.	Description
1	Control cabinet lamp
2	Control cabinet lamp switch
3	Time counter
4	Control module
5	Key switch
6	Main circuit breaker
7	Live wire terminal
8	Neutral wire terminal
9	Ground wire terminal
10	Remote control/Mains input

Control & field wiring cabinet

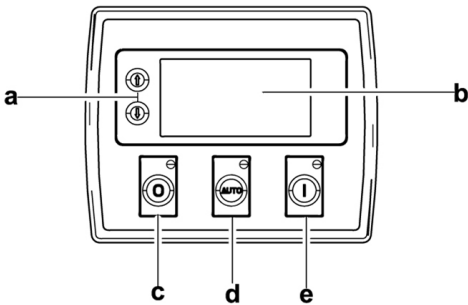

Control module

Ref.	Description
a	Navigation button; Accept (Configuration mode only)
b	Main status display
c	Stop/reset button; Next page (Configuration mode only)
d	Auto start button; Decrease value/next item (Configuration mode only)
e	Start button; Increase value/next item (Configuration mode only)

Product Standard Configuration

Alternator	Control System	Fuel System	Lubrication System	Cooling System
Alternator A.V.R	PLC-7420 Control System Observation Window and Control Door Air Breaker External Cable Connection Cable Line Slot	Base Fuel Tank Water Separator Fuel Prefilter Fuel Tank Drain Fuel Level Control Panel Display	Lube Oil Drain Pump	50°C Radiator External Water Inlet Supplied with Coolant Protection Mesh for Fan and Revolving Parts
Air intake system	Exhaust system	Shipment and Installation	Safety protection devices	Technical documents
Air Filter Intake Air Filter Screen Intake Air Silencer	Industrial Silencer Heat Insulation Protective Sleeve Exhaust Outlet with Flexible Heat Hand Protection	Forklift Lifting Points Lifting Lug Dragging Hole Side Collision Avoidance Design Base Mounting Hole	Earth Protection Oil Pressure Warning/Downtime Water Temperature Warning/Downtime Water Level Warning/Downtime Speed Warning/Downtime External Emergency Stop	Genset Operation Manual Engine Operation Manual Alternator Operation Manual Genset Test Report Genset Circuit Diagram Genset Installation Drawings Maintenance Manual Maintenance Records
Engine	Machine Body			
Water-Cooled Engine Battery Battery Switch Draining Oil Pump Standard Air Filter Electronic Governor Radiator Core Guard Battery Charger Air Filter with Replaceable Cartridge	Silence Cotton Inside Canopy Central Lifting Point Baseplate with Retention Tank Forklifts			

Optional Configuration

Alternator	Control System	Fuel System	Lubrication System	Cooling System
PMG Anti-condensation Heater Winding Temperature Measurement	PLC-920 Control System PLC-8610 Control System Leak Protection Device	External Fuel Filling Device Fuel Level Gauge Auto Refilling Diesel System Oil Pan Fuel Three-Way Valve	Auto Refilling Oil System Lube Oil Preheater Oil Level Gauge Lube Oil Temperature Sensor	45°C Radiator 40°C Radiator
Air intake system	Exhaust system	Voltage	Wheel Braking System	Safety protection devices
Forced Air Inlet System Intake Air Preheating System	Residential Silencer	415/240V 400/230V 380/220V 220-240V-SINGLE PHASE 220/127V 480/277V 440/254V	Trailer-Roadside Type Trailer-Off-Road Type Trailer Suspension System	RCD Protection Oil Level Warning/Downtime Imbalanced Three-phase Warning/Downtime Spark-extinguishing Device Anti-lightning Installation Secure Transportation Open the Door Shutdown Protection Extinguisher Explosion-proof Lamp No-skid Floor Rest Area
High-tech configuration	Optional configuration	Technical documents	Engine	
Remote Control Remote Communication and Diagnosis Remote Monitor Auto Start-Stop System Alert Message Notification Maintenance Cycle Notification	Three-way Catalytic Converter Engine Triple Painted Genset Parallel Installation External Fuel Tank SECC Base Frame Stainless Steel Exhaust System 4 Poles Circuit Breaker ATS Quick Connector Fuel Leaking Protection	Genset Parts Manual Engine Parts Manual Genset Tools Package	Jacket Water Heater 220/240V Oil Heater Heavy Duty Air Filter Block Heater	



www.multiphase-power.com

Multiphase Power reserves the right to make changes in model, technical specification, color, configuration and accessories without prior notice. Please contact the salesman before ordering.

EP Series / May.2013

