




**MULTIPHASE  
POWER**

Diesel Generator Set

# MPY250C

Powered By Cummins

50 Hz / 1500 RPM

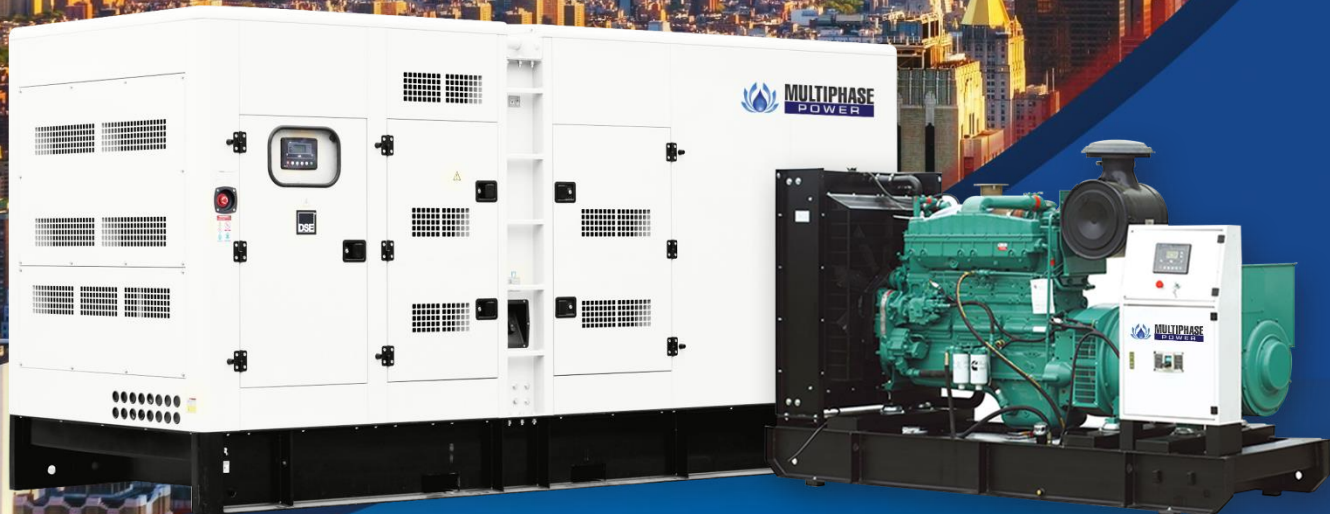

**MULTIPHASE CORPORATION CO., LTD.**

90 CW Tower, Room No.A2102, 21st Floor, Ratchadapisek Road,  
Khwaeng Huai Khwang, Khet Huai Khwang, Bangkok 10310  
Tel. : +66 02 168 3193-5 Fax. : +66 02 168 3192

Email : [marketing@multiphase-corp.com](mailto:marketing@multiphase-corp.com) Website : [www.multiphase-power.com](http://www.multiphase-power.com)  
Facebook : [www.facebook.com/MultiphasePower](http://www.facebook.com/MultiphasePower) Line ID : @multiphasepower



# MPY250C



| MODEL                         | FREQUENCY / RPM | STANDBY POWER | PRIME POWER |
|-------------------------------|-----------------|---------------|-------------|
| MPY250C<br>Powered by Cummins | 50 Hz/1500 RPM  | 202 kW        | 184 kW      |
|                               |                 | 253 kVA       | 230 kVA     |


- Available for voltages 400/230V, 480/277V, 380/220V, 440/254V, 416/240V, 220/127V, 208/120V
- All datas based on ISO 3046, altitude 100m (328ft), barometric pressure 100kPa (29.53 inHg), air temperature 25 °C (77 °F), relative humidity 30%.
- Diesel generators comply with standards : ISO8528, ISO14000, ISO3046, GB755, BS5000, VDE0530, IEC34-1
- Model : MPYxxCS – S Suffix for silent type

## GENERAL CHARACTERISTICS

|                    |                       |
|--------------------|-----------------------|
| Model              | MPY250C               |
| Engine             | Cummins 6LTAA8.9-G2   |
| Alternator         | Leroy Somer TAL-A46-C |
| Voltage (V)        | 400/230               |
| Current (A)        | 332                   |
| Connection         | 3 Phase, 4W/Y         |
| Frequency          | 50 Hz                 |
| Engine Speed (RPM) | 1500                  |
| Rated Power Factor | 0.8                   |
| Controller Model   | DSE7320               |

## DIMENSIONS

| DIMENSIONS      | OPEN TYPE | SILENT TYPE |
|-----------------|-----------|-------------|
| Length (L)      | 2600 mm   | 3800 mm     |
| Width (W)       | 1050 mm   | 1300 mm     |
| Height (H)      | 1820 mm   | 1850 mm     |
| Net Weight (KG) | 1900 kg   | 2750 kg     |



### MULTIPHASE CORPORATION CO., LTD.

90 CW Tower, Room No.A2102, 21st Floor, Ratchadapisek Road,  
Khwaeng Huai Khwang, Khet Huai Khwang, Bangkok, 10310 Tel. : +66 02 168 3193-5  
Website : www.multiphase-power.com Line ID : @multiphasepower



## STANDARD CONFIGURATION

|                                 |  |
|---------------------------------|--|
| <b>Engine</b>                   | Cummins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.  |
| <b>Alternator</b>               | Leroy Somer brushless AC alternator  |
| <b>Radiator</b>                 | Silent Type 50 °C (Open Type 40 °C), fan protective shroud   |
| <b>Base Frame</b>               | ≤ 550 KW : base mounted fuel tank, anti-vibration pads, battery holder<br>> 550 KW : channel steel base frame, anti-vibration pads, battery holder |
| <b>Circuit Breaker</b>          | ABB BREAKER  |
| <b>Control System</b>           | DEEP SEA 7320  |
| <b>Start Battery</b>            | Dry charged battery, available for 6 times starts under standard condition; connection cables.   |
| <b>Installation Accessories</b> | Bellow, Elbow and Flange, Exhaust Silencer, etc.   |
| <b>Documents</b>                | Electric drawing, Operation & Maintenance Manual, Certification etc.   |

## OPTIONAL CONFIGURATION

|                                   |  |
|-----------------------------------|--|
| <b>Engine Accessories</b>         | <ul style="list-style-type: none"> <li>• Heavy-Duty Air Filter</li> <li>• Coolant Heater</li> <li>• Lube Oil Heater</li> <li>• Fuel and Water Separator</li> </ul>   |
| <b>Alternator and Accessories</b> | <ul style="list-style-type: none"> <li>• Stamford or Leroy Somer or Others</li> </ul>  |
| <b>Cooling System</b>             | <ul style="list-style-type: none"> <li>• High Voltage ___ kV</li> <li>• 50 °C Radiator</li> <li>• Heat Exchanger + Water Cooling Tower + External Water Circulation Pumping System</li> <li>• Remote Horizontal Water Tank System</li> </ul> |
| <b>Control System</b>             | <ul style="list-style-type: none"> <li>• AMF</li> <li>• Parallel</li> <li>• Practical Type in Low Temperature Environment</li> <li>• Control Screen Heater</li> <li>• Other</li> </ul>   |
| <b>Circuit Breaker</b>            | <ul style="list-style-type: none"> <li>• ¾ Poles</li> <li>• Fixed/Handcart Type</li> <li>• Electric Mechanism</li> </ul>   |
| <b>Automatic Transfer Switch</b>  | <ul style="list-style-type: none"> <li>• ATS Cabinet</li> </ul>  |
| <b>Start Battery</b>              | <ul style="list-style-type: none"> <li>• Nickel-Cadmium Battery</li> <li>• Maintenance-Free Battery</li> <li>• Power Charger and Selector</li> <li>• Charging Current Meter</li> </ul>   |
| <b>External Fuel Tank</b>         | <ul style="list-style-type: none"> <li>• 500 L, 1000 L, 1500 L, 2000 L, 2500L, 3000L, 4000L, 5000L</li> </ul>  |

### MULTIPHASE CORPORATION CO., LTD.

90 CW Tower, Room No.A2102, 21st Floor, Ratchadapisek Road,  
Khwaeng Huai Khwang, Khet Huai Khwang, Bangkok, 10310 Tel. : +66 02 168 3193-5  
Website : www.multiphase-power.com Line ID : @multiphasepower



## ENGINE DATA

|  |  |
|--|--|
| Engine Model                               | Cummins 6LTAA8.9-G2                          |
| Engine Power                               | 250 kW.                                      |
| Aspiration                                 | Turbocharged & Air to Air-Aftercooled        |
| Displacement (L)                           | 8.9  |
| Type                                       | In-Line                                      |
| Bore x Stroke (mm)                         | 114 x 145                                    |
| No. of Cylinders                           | 6  |
| Compression Ratio                          | 16.6 : 1                                     |
| Governor Type                              | Electronic Governor                          |
| Rated Speed (RPM)                          | 1500   |
| Prime Power Fuel Consumption (L/h)         | 54   |
| Standby Power Fuel Consumption (L/h)       | 59   |
| Fuel                                       | ASTM D975 No.2-D or BS2869 1998 Class A1, A2 |
| Injection System                           | BYC P7100                                    |
| Lube Oil Capacity (L)                      | 27.6   |
| Lube                                       | API CF-4 15W40                               |
| Max. Temperature (°C)                      | 121  |
| Coolant Capacity (L)                       | 34   |
| Max. Top Tank Temp. (°C)                   | 104  |
| Std. Thermostat (Modulating) Range (°C)    | 82-95  |
| Fan Drive Method                           | Shaft Drive                                  |
| Cooling Fan Air Flow (m <sup>3</sup> /min) | 460  |
| Combustion Air Flow (m <sup>3</sup> /min)  | 12.96/14.1                                   |
| Maximum Air Intake Restriction (kPa)       | 3.7  |
| Exhaust Gas Flow (m <sup>3</sup> /min)     | 35.04/38.58                                  |
| Max. Back Pressure (kPa)                   | 10   |
| Exhaust Gas Temp (°C)                      | ≤ 542  |
| Exhaust Pipe Size (mm)                     | φ 102  |
| Start Mode                                 | DC24V Electric Start                         |
| Battery                                    | 2 x 150 Ah                                   |

## ALTERNATOR DATA

|                      |                       |                    |                |
|----------------------|-----------------------|--------------------|----------------|
| Alternator Model     | Leroy Somer TAL-A46-C | Rate Power         | 184/230 kW/kVA |
| PF.                  | 0.8                   | Voltage            | 400/230 V      |
| Phase                | 3                     | Frequency          | 50 Hz.         |
| Connection           | 3P 4W/Y               | Bearing            | 1              |
| Winding Pitch        | 2/3                   | Protection Class   | IP23           |
| Insulation Class     | H                     | Efficiency         | 92%            |
| Tel. Influence       | TIF < 50              | Voltage Regulation | ±1.0%          |
| Harmonic Coefficient | THF < 2%              | AVR                | R150           |
| Voltage Adjust Scope | ≥±5%                  | Excitation System  | SHUNT          |

### MULTIPHASE CORPORATION CO., LTD.

90 CW Tower, Room No.A2102, 21st Floor, Ratchadapisek Road,  
 Khwaeng Huai Khwang, Khet Huai Khwang, Bangkok, 10310 Tel. : +66 02 168 3193-5  
 Website : www.multiphase-power.com Line ID : @multiphasepower



## CONTROL SYSTEM DATA (DSE7320)



### Main Feature

The DSE7320 will also monitor the mains (utility) supply. The modules include USB, RS232 and RS485 ports as well as dedicated DSENet® terminals for system expansion.

### Key Function

- 4-Line back-lit LCD text display
- Five key menu navigation
- Front panel editing with PIN protection
- Customisable status screens
- Power save mode
- Support for up to three remote display units
- 9 configurable inputs
- 8 configurable outputs
- Flexible sender inputs
- Configurable timers and alarms
- 3 configurable maintenance alarms
- Multiple date and time scheduler
- Configurable event log (250)
- Integral PLC editor
- Easy access diagnostic page
- CAN and Magnetic Pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- Charge alternator failure alarm
- Manual speed control (on compatible CAN engines)
- Manual fuel pump control
- Power monitoring (kWh, kVAR, kVAh, kVArh)
- Load switching (load shedding and dummy load outputs)
- Automatic load transfer (DSE7320)
- Backed up real time clock
- Start & stop capability via SMS messaging
- USB connectivity
- Tier 4 CAN engine support
- DSENet ® expansion compatible etc.

### MULTIPHASE CORPORATION CO., LTD.

90 CW Tower, Room No.A2102, 21st Floor, Ratchadapisek Road,  
Khwaeng Huai Khwang, Khet Huai Khwang, Bangkok, 10310 Tel. : +66 02 168 3193-5  
Website : www.multiphase-power.com Line ID : @multiphasepower

